


# OTDR Report

## Link Measurements

Link Loss	: 0.896 dB	Avg. Splice Loss	: 0.207 dB
Link Length	: 1.9507 km	Max. Splice Loss	: 0.207 dB
Average Loss	: 0.459 dB/km	Total ORL	: 39.21 dB

## OTDR Trace

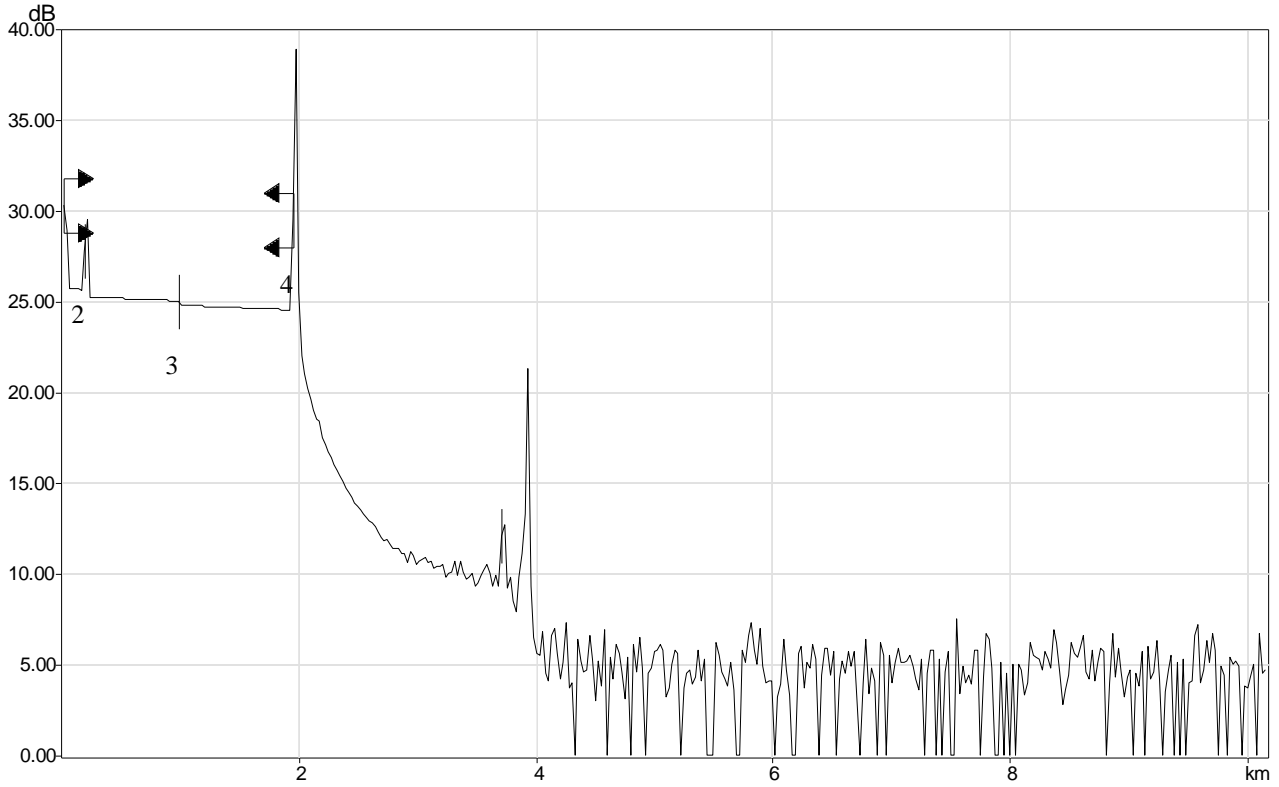

## Test and Cable Setup


Wavelength	: 1310 nm (SM-9 $\mu$ m)	Acq. Time	: 30 s
Filename	: 300wl-660r-2.TRC	Pulse Width	: 100 ns
Hardware	: FTB-7523B-B-EI	Helix Factor	: 0.00 %
Serial Number	: 131376-3B	Splice Loss Threshold	: 0.020 dB
Software	: N/A	Reflectance Threshold	: -72.0 dB
Range	: 10.0 km	End-of-Fiber Threshold	: 5.000 dB
IOR	: 1.46770		
RBS	: -79.47		

# OTDR Report

## Link Measurements

Link Loss	: 1.050 dB	Avg. Splice Loss	: 0.177 dB
Link Length	: 1.9500 km	Max. Splice Loss	: 0.177 dB
Average Loss	: 0.538 dB/km	Total ORL	: 40.84 dB

## OTDR Trace

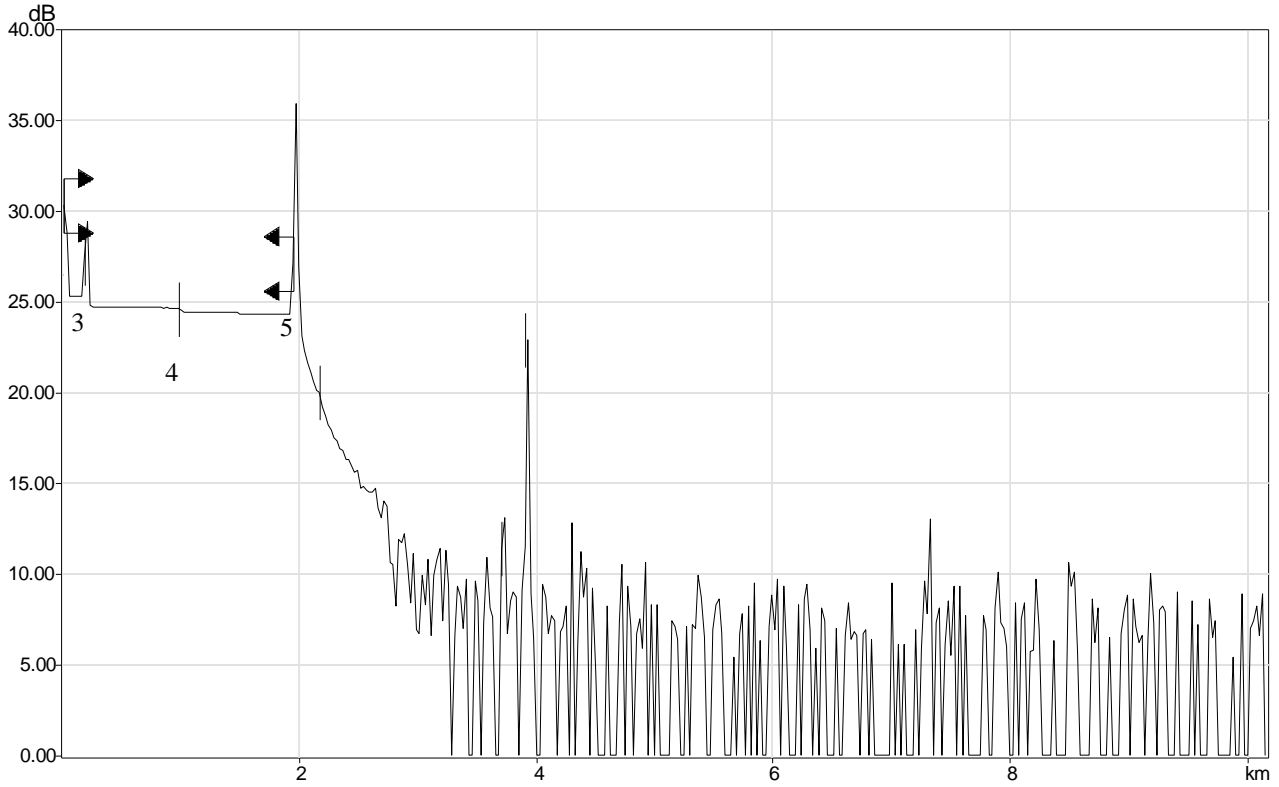

## Test and Cable Setup

Wavelength	: 1550 nm (SM-9 $\mu$ m)	Acq. Time	: 1 s
Filename	: 300wl-660r-2.TRC	Pulse Width	: 100 ns
Hardware	: FTB-7523B-B-EI	Helix Factor	: 0.00 %
Serial Number	: 131376-3B	Splice Loss Threshold	: 0.020 dB
Software	: N/A	Reflectance Threshold	: -72.0 dB
Range	: 10.0 km	End-of-Fiber Threshold	: 5.000 dB
IOR	: 1.46820		
RBS	: -81.90		